

1045099279, 927  
7

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



Rec'd PCT/PTO 01 OCT 2004



(43) International Publication Date  
20 November 2003 (20.11.2003)

PCT

(10) International Publication Number  
WO 03/095367 A1

(51) International Patent Classification<sup>7</sup>: C02F 1/02,  
B67D 1/07, A61L 2/07

(21) International Application Number: PCT/GB02/02097

(22) International Filing Date: 7 May 2002 (07.05.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): THE  
COCA-COLA COMPANY [US/US]; One Coca-Cola  
Plaza, NW, Atlanta, GA 30313 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WILLIAMS, Gra-  
ham [GB/GB]; 96 Saxon Wood Road, Shirley, Solihull,  
West Midlands B90 4JR (GB).

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,  
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,  
MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,  
YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).


Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

(54) Title: SELF-SANITISING WATER TREATMENT APPARATUS WITH A RESERVOIR FOR TREATED WATER THAT  
INCLUDES A HEATING ELEMENT

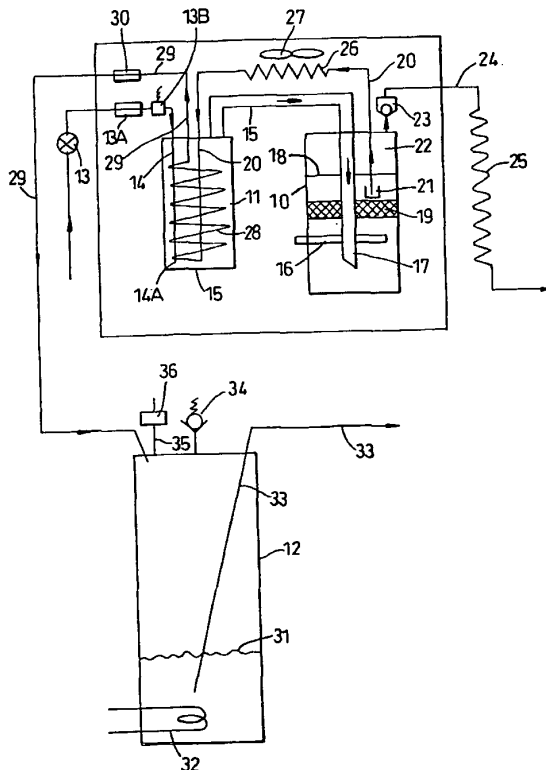

(57) Abstract: Water treatment apparatus has a reservoir (12) for receiving and storing purified water until required, for example in a beverage dispenser. The water is purified by heating in housing (10) and is cooled in heat exchanger (11) prior to delivery to the reservoir (12). The reservoir (12) includes a heating element (32) for heating the purified water and passing steam generated in the reverse direction back through the heat exchanger (11) to the housing (10) to sanitise the apparatus.

WO 03/095367 A1

SELF-SANITISING WATER TREATMENT APPARATUS WITH A RESERVOIR FOR TREATED WATER  
THAT INCLUDES A HEATING ELEMENT

This invention relates to a water treatment apparatus and is particularly concerned to provide a water treatment apparatus that can  
5 readily be sanitised by the passage of steam through it.

The invention is also particularly concerned with water treatment apparatus in which water is purified and is intended for use in a post-mix beverage dispenser and, although not intended to be limited thereto, the invention will be more specifically described below with reference  
10 to purifying water for post-mix beverages.

Water treatment apparatus for post-mix beverages is well known. For example it is known from US 4 844 796 to provide a water treatment apparatus for post-mix beverage dispensers in which the water to be treated is passed into a removable disposable cartridge having a  
15 first, reactor section and a second, filter section wherein the water is heated in the reactor section firstly by passing through a heat exchanger and secondly by means of a heater. The heater is positioned in a central aperture defined by an annular portion of the cartridge whereby it does not come into direct contact with the water.

20 A similar heater arrangement is disclosed in US 5 858 248 where the heater can be located in the central cavity of a disposable cartridge of a water treatment device. Alternative heater arrangements disclosed in this application are to position the heater around the outer cylindrical surface of the cartridge or to have a gas cylinder heater beneath a central  
25 "chimney", i.e. the central cavity defined by the annular portion of the cartridge.

In our international patent application No. PCT/GB 00/03329 we have described and claimed a water treatment apparatus having an inlet for the water to be treated, an outlet for the treated water, a heater within the housing to come into direct contact with the water and a filter  
5 between the heater and the outlet, and means to fill the housing with water up to a maximum level which leaves a headspace between the water and the roof of the housing, the entrance to the outlet being below the operating water level.

In most of the previously suggested water treatment apparatus  
10 arrangements, it is usual for the purified water to be passed to a reservoir, possibly via a cooler, and the purified water is drawn off from the reservoir as required, e.g. for mixing with a concentrate to form a post-mix drink. The reservoir may conveniently be a flexible container, e.g. a collapsible bag.

15 It will be appreciated that the water treatment apparatus, regardless of its specific construction, must from time to time be sanitised to ensure that no unwanted contamination, particularly bacterial contamination, can harmfully affect the treated water.

Various means of achieving the desired sanitisation, of varying  
20 degrees of complexity and success, have been proposed. It is an object of the present invention to provide an improved means of achieving the desired sanitisation.

Accordingly, the invention provides a water treatment apparatus comprising a treatment housing through which the water is passed, the  
25 housing being connected to a reservoir for the treated water from the housing, the reservoir containing a heater to heat the treated water to generate steam, controls to start and stop flow of water to be treated

through the housing and to switch on the reservoir heater and to stop the flow of water when sanitisation is required, whereby steam may be passed through the apparatus in the reverse direction to the water, the housing having a relief valve for escape of the steam from the reservoir.

5        Clearly the construction of and material from which the reservoir is made must be sufficiently strong to withstand the steam pressure and temperature when the reservoir heater is used. For example, a rigid metal or plastic reservoir should be able to withstand a pressure of at least one bar and a temperature up to about 120°C.

10        The treatment housing may conveniently be in the form of a disposable cartridge although this is not essential. The treatment for the water passing through the housing will usually comprise a heater, which may be in direct or in indirect contact with the water and a filter between the heater and the outlet from the housing. It may additionally comprise  
15        one or more perforated screens or meshes between the heater and the filter.

      The outlet from the treatment housing, which leads to the reservoir, may conveniently be through the closed upper end of the housing e.g. of the cartridge or other cylindrical housing construction.

20        The housing preferably has one or more probes or other means to detect the water level therein whereby the water may be filled up to a maximum level to leave a headspace in the filled housing. The outlet from the housing preferably extends beneath the level of the water so that hot water leaving the housing does not go through the headspace.  
25        Steam and volatiles collect in the headspace during normal operation of the apparatus and these may be allowed to escape through a pressure

relief valve, which may be the same pressure relief valve used to vent the steam during the sanitisation mode.

The untreated water, which may be mains water, may first pass through a heat exchanger to warm it before it passes into the housing.

- 5 Treated heated water leaving the housing may be passed in the opposite direction through the heat exchanger to act as the heat exchange medium to warm the incoming mains water. The treated water is, thereby, conveniently cooled before being passed to the reservoir.

- 10 In another preferred embodiment the heat exchanger and the water treatment housing may be contained in a single unit, preferably with the heat exchanger directly beneath the water treatment housing. This may be a unitary structure or two separate units, water treatment housing and heat exchanger, which may be completely or partially disposable. For example, the water treatment housing may be a  
15 disposable cartridge and the heat exchanger non-disposable.

- This single unit arrangement has the advantage that pipework between the heat exchanger and the water treatment housing can be considerably reduced, if not eliminated. The heated water from the heat exchanger may pass directly into the water treatment housing and the  
20 treated water from the housing can pass directly back to the coils of the heat exchanger in order to heat the incoming water. This arrangement reduces the regions where precipitation deposits may build up and harmfully affect water flow. Also, with the heat exchanger directly below the water treatment housing, the inlet to the water treatment  
25 housing can readily enter at its cooler, lower end.

The inlet for the water to be treated may conveniently enter through the floor of the treatment housing but this is not essential. For

example, in some embodiments the water to be treated may enter the housing through a pipe entering the housing through or near the roof, which pipe extends downwardly inside the housing towards its base. On leaving the pipe, the water, once the housing is filled to the lower end of the pipe, will then travel upwardly.

It will be appreciated that, where a heat exchanger is used as described above, the steam generated in the reservoir in the sanitisation mode will pass through the heat exchanger before reaching the housing and hence will also sanitise the heat exchanger.

10 The heater in the treatment housing will have a wattage capacity determined by the volume of water to be treated and the throughput of the treatment housing. For example, a heater of from 1000 to 2000 watts can usefully be employed for a throughput of 12 to 18 litres per hour, i.e. the input of water into the treatment housing.

15 The heater in the reservoir, which may be, e.g. an immersion heater, will similarly require a wattage dependent on the capacity of the reservoir, e.g. for a capacity of from 20 to 50 litres, a wattage of from 1500 to 2500 would be suitable.

20 The reservoir with the heater may be a small secondary tank primarily for sanitisation purposes and a separate larger reservoir downstream of the secondary tank may be employed, if desired.

The control to start and stop flow of untreated water into the treatment housing may be a simple on/off valve, e.g. on the mains supply pipeline. The control to switch on the heater in the reservoir may be co-ordinated so as to be timed to operate shortly after the flow of untreated water is stopped or, alternatively, the flow of water may be stopped at the same time or shortly after the reservoir heater is switched

on. The outlet from the reservoir should be closed when the reservoir heater is in use, except as described below where it is desired to sanitise any equipment downstream of the reservoir. The control means preferably ensures that steam cannot be generated in the reservoir to reach a pressure at which it is forced to travel through the apparatus in the opposite direction to normal water travel until the water flow has been switched off. Water, condensed steam and steam may all be forced through the pressure relief valve in the treatment housing during the sanitisation process.

10       The pressure relief valve may operate, for example, at about 0.7 bar. It may be, for example, a spring-loaded or a dead weight valve of the types well known in the art. The pressure relief valve may lead to a condenser tube so that steam and unwanted volatiles can be cooled before being allowed to drain away.

15       Embodiments of the invention will now be described with reference to the accompanying drawing (Figure 1) which is a schematic arrangement of one form of apparatus according to the invention.

      The water treatment apparatus of Figure 1 has a treatment housing 10, a heat exchanger 11 and a reservoir 12 for the treated water. An inlet solenoid 13A controls supply of untreated, usually mains, water into the heat exchanger 11. (The direction of water flow through the apparatus during normal treatment procedure is shown by the arrows.) When the inlet solenoid is operated to allow water inflow, the untreated water then passes via the mains water stop valve 13, valve 13A and a pressure regulator 13B into an inlet tube 14 which extends through the top of roof of heat exchanger 11 and extends down inside the heat exchanger to a position a little above its base 15. Water exits from the

lower end 14A of tube 14 and, when the heat exchanger is filled with water, it exits from tube 15 in its roof. Heat exchanger 11 also contains a return coil 28 to receive treated water from housing 10 and this is described in more detail below.

5        Inside water treatment housing 10 is a high density electric heating element 16 of, say, 1500 watts capacity in the lower half of the housing. Element 16 is connected to conventional electrical circuiting (not shown) whereby the heater can be switched on and off as required.

10        Untreated water entering housing 10 from tube 15 passes down a larger internal diameter tube 17 which extends to the lower half of the housing. Incoming water fills housing 10 to a maximum level 18 controlled by one or more probes (not shown). The water, therefore, surrounds heater 16 and can be heated thereby.

15        Surrounding tube 17 and spaced above heater 16 is a filter 19. Heated water is forced upwardly through the filter by the pressure of incoming water up to level 18. The heated water leaves housing 10 via a tube 20 through its upper end. Tube 20 extends below water level 18 and receives the heated water from a "quiet zone" defined by a tray 21 beneath the water level 18. Delivery pressure of the treated water into  
20        tube 29 is governed by the boiling taking place in the headspace 22 above water level 18 and is controlled by pressure relief valve 23 which allows hot water and/or steam with unwanted volatiles from the treated water to escape into relief tube 24 and cooling coil 25 when the internal pressure in the housing exceeds a predetermined value, e.g. 0.7 bar.  
25        From tube 25 the condensate passes to a drain.

      The hot treated water passes through tube 20 via a cooling tube 26 and fan 27 into heat exchanger 11. Tube 20 communicates into coil 28



near base 15 of the heat exchanger and the treated water passes up the coil 28 to exit through tube 29 through the heat exchanger roof. The treated water, therefore, exchanges heat with the cooler incoming untreated water inside the heat exchanger. Tube 29 leads via an outlet solenoid valve 30 into reservoir 12.

The water is shown having reached a level 31 in reservoir 12, which contains a heater 32 near its base. An outlet tube 33 extends below the water level and is the dispense means of treated water from the reservoir.

The roof of the reservoir 12 contains a pressure relief valve 34 set, for example, at about 1 bar, for safety purposes and an air vent 35 containing a filter 36. This venting arrangement allows smooth filling of the reservoir while preventing unwanted contamination from entering.

When it is desired to sanitise the apparatus, flow of water into the apparatus is switched off by closing inlet solenoid 13A. Reservoir heater 32 is switched on with outlet 33 closed, thereby generating steam in the headspace above water level 31. The pre-cool fan 27 is switched off. Outlet solenoid 30 is maintained open. Steam generated in the reservoir passes in the reverse direction to the normal water flow direction through tube 29, coil 28 of the heat exchanger 11, cooling tube 26 and tube 20 into the treatment housing 10. When sufficient pressure is generated in the heat exchanger, steam and/or condensed water is vented through relief valve 23, line 24 and condenser 25 to drain away.

The arrangement may be automatically controlled by a thermistor (not shown) in the housing 10 which can switch off the reservoir heater when a predetermined temperature is reached.

Normal water treatment may then be resumed.

If desired steam and hot water may also be sent downstream by opening outlet 33 of the reservoir during the sanitisation process to  
5 sanitise the downstream equipment, e.g. the post-mix apparatus

The apparatus of the invention has significant advantages in that:

- it does not require chemicals for sanitisation;
- it can readily be adapted for existing apparatus; and
- 10 it can be partly or fully automated, as desired.

The invention also includes a method of sanitising water treatment apparatus of the type having a treatment housing for water to be treated and a reservoir for treated water, the method including the steps of  
15 stopping water flow through the apparatus, heating treated water in the reservoir to generate steam, and passing the steam through the apparatus in the reverse direction to the water flow.

Preferably, the method further includes the step of passing the steam in  
20 the direction of water flow from the reservoir to sanitise apparatus downstream of the reservoir.

## CLAIMS

1. A water treatment apparatus comprising a treatment housing through which the water is passed, the housing being connected to a  
5 reservoir for the treated water from the housing, the reservoir containing a heater to heat the treated water to generate steam, controls to start and stop flow of water to be treated through the housing and to switch on the reservoir heater and to stop the flow of water when sanitisation is required, whereby steam may be passed through the apparatus in the  
10 reverse direction to the water, the housing having a relief valve for escape of the steam from the reservoir.
2. A water treatment apparatus according to Claim 1, in which the reservoir is of metal or plastic and can withstand a pressure of at least one bar and a temperature up to 120°C.
- 15 3. A water treatment apparatus according to Claim 1 or 2, in which the housing is a disposable cartridge.
4. A water treatment apparatus according to Claim 1, 2 or 3 in which the housing contains a heater to heat the water to be treated and a filter between the heater and an outlet from the housing for the treated water.
- 20 5. A water treatment apparatus according to Claim 4, which contains one or more perforated meshes or screens between the heater and the filter.
6. A water treatment apparatus according to any preceding claim, in which the housing has a probe to detect the water level and the  
25 apparatus controls are arranged to switch off incoming water when a predetermined maximum water level is reached, the maximum level leaving a headspace in the housing above the water.

7. A water treatment apparatus according to Claim 6, in which the relief valve for the steam from the reservoir is positioned so as to allow escape from the headspace of steam and volatiles from the treated water.

8. A water treatment apparatus according to any preceding claim,  
5 which includes a heat exchanger connectable to a source of untreated water between the source and the treatment housing whereby untreated water can be passed through the heat exchanger on its way to the treatment housing, the heat exchanger being also connected to an outlet from the treatment housing whereby heated treated water can be passed  
10 through the heat exchanger in heat exchange relationship with the incoming untreated water.

9. A water treatment apparatus according to any preceding claim, in which the reservoir heater has a wattage of from 1500 to 2500 and the reservoir has a capacity of from 20 to 50 litres.

15 10. A water treatment apparatus according to any one of Claims 1 to 8, in which the reservoir with the heater is a small secondary tank and the apparatus includes a separate larger reservoir downstream of the tank.

11. A water treatment apparatus according to any preceding claim, in  
20 which the controls are arranged to switch on the reservoir heater at the same time or shortly after flow of untreated water into the housing is stopped.


12. A water treatment apparatus according to any preceding claim, in  
25 which the pressure relief valve is of the spring-loaded or dead weight type.

13. A water treatment apparatus according to any preceding claim, in which the pressure relief valve leads to a condenser tube and then a drain.

14. A method of sanitising water treatment apparatus of the type having a treatment housing for water to be treated and a reservoir for treated water, the method including the steps of stopping water flow through the apparatus, heating treated water in the reservoir to generate steam, and passing the steam through the apparatus in the reverse direction to the water flow.

10

15. A method according to claim 14, in which the steam is also passed in the direction of water flow from the reservoir to sanitise apparatus downstream of the reservoir.

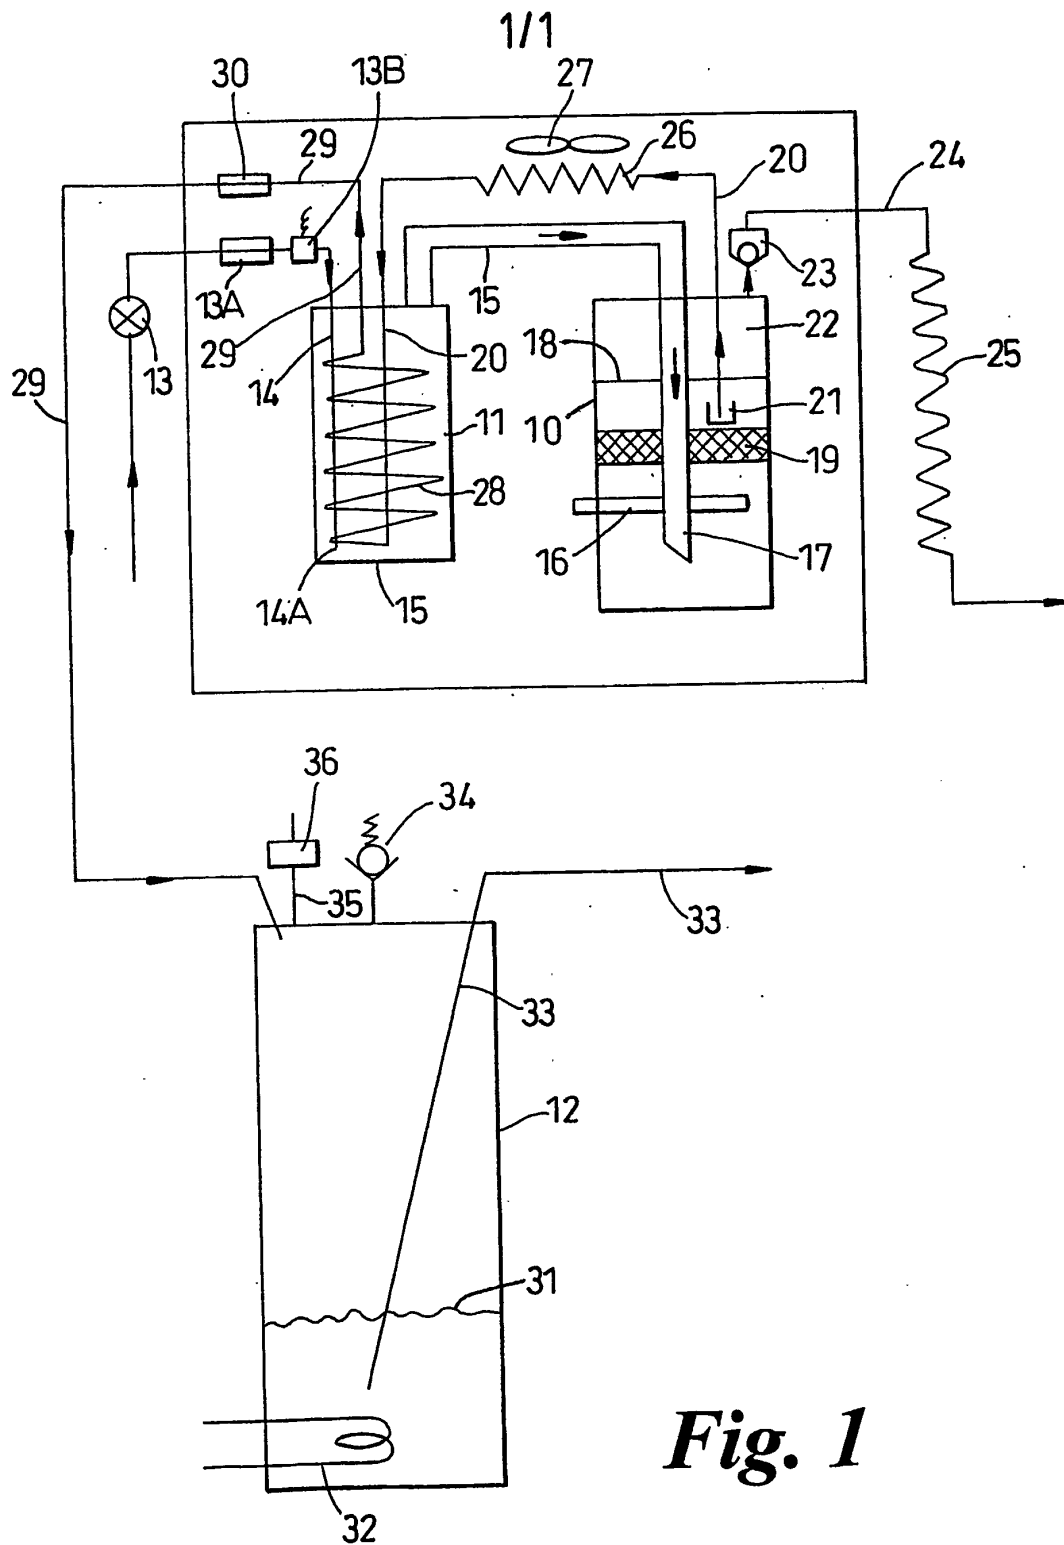

**Fig. 1**

## INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/GB 02/02097

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 C02F1/02 B67D1/07 A61L2/07

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C02F B67D A61L B08B B01D A47J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 92143 A (LUCIA FIORENZO DE ;IDEAMATIC S R L (IT); SERGIO MASSIMO (IT)) 6 December 2001 (2001-12-06) page 5, line 26 -page 6, line 4; figure 1	14, 15
A	WO 01 19734 A (WIEMER KLAUS ;WILLIAMS GRAHAM (GB); IMI CORNELIUS UK LTD (GB); JOH) 22 March 2001 (2001-03-22) cited in the application the whole document	1-13
A	GB 2 350 358 A (IMI CORNELIUS) 29 November 2000 (2000-11-29) claim 22; figure 1	1-13

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

14 January 2003

Date of mailing of the international search report

24/01/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Beckmann, O

# INTERNATIONAL SEARCH REPORT

nation on patent family members

Internat Application No

PCT/GB 02/02097

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0192143	A	06-12-2001	IT MI20001189 A1 AU 7447701 A WO 0192143 A1	29-11-2001 11-12-2001 06-12-2001
WO 0119734	A	22-03-2001	AU 6855100 A BR 0013983 A CN 1374929 T EP 1218294 A1 WO 0119734 A1 GB 2354233 A	17-04-2001 02-07-2002 16-10-2002 03-07-2002 22-03-2001 21-03-2001
GB 2350358	A	29-11-2000	AU 6355099 A WO 0025887 A1	22-05-2000 11-05-2000